
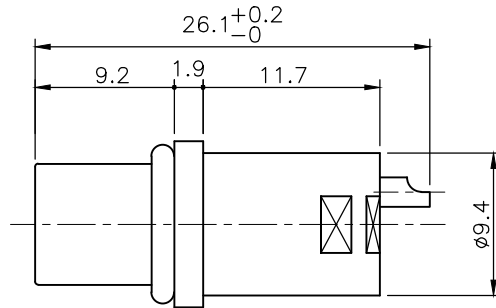

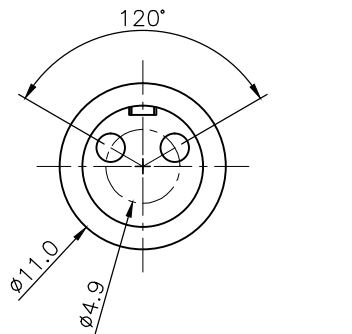


REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2016/06/21
2	ECR220421001	FROS	2022/04/21
3	ECR240729001	TIM	2024/07/30

SPECIFICATION:

- Current Rating: 4A
- Voltage Rating: 250V
- Waterproof: IPX7
- Operating temperature range: -40°C~+85°C

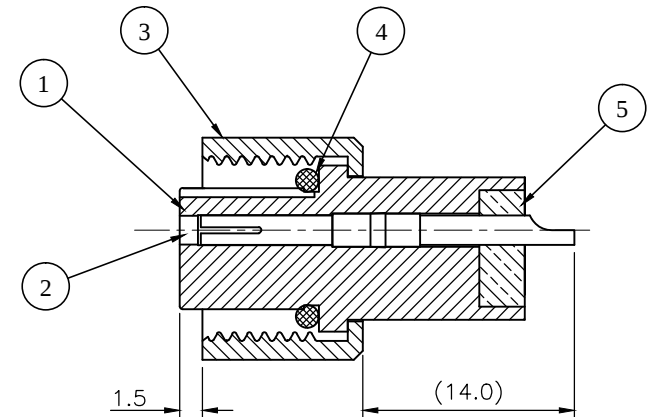

5	EPOXY BASE	EF400A&EF400B, Black	
4	O-RING	EPDM, Black	
3	NUT	Brass, Nickel plating	
2	CONTACT	Brass, Gold plating over Nickel	
1	HOUSING	PBT, UL94V-0, Black	
NO. PART NAME		DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
m m			
			
WWW.ATTEND.COM.TW			
DRAWN	Fros	2016/06/21	DRAWN NAME:
CHECKED	Ron	2016/06/21	M12 A- Code Plug for Cable
APPROVED	Ken	2016/06/21	2Pin Female For Overmold with Cable
APPROVED		Ken	2016/06/21
PRODUCT NO.		216A-02FO0	
FILE NAME		216A-02FO0_B_3	
			
SCALE 2/1		SHEET 1/1	SIZE A4