
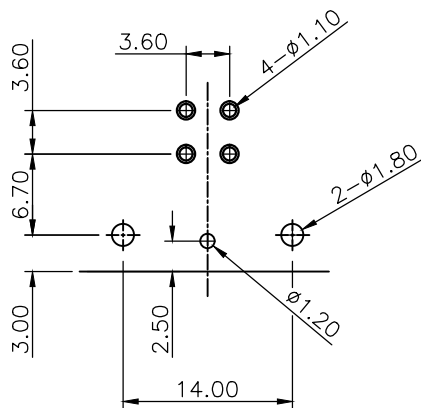
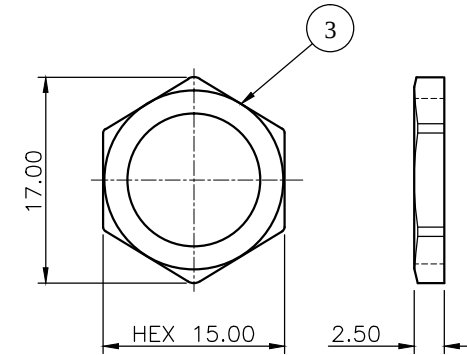



REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2017/06/19
2	ECR220421001	TIM	2022/04/21

SPECIFICATION:

1. Current Rating: 4A
2. Voltage Rating: 250V
3. Waterproof: IPX7
4. Operating temperature range: -40°C~+85°C

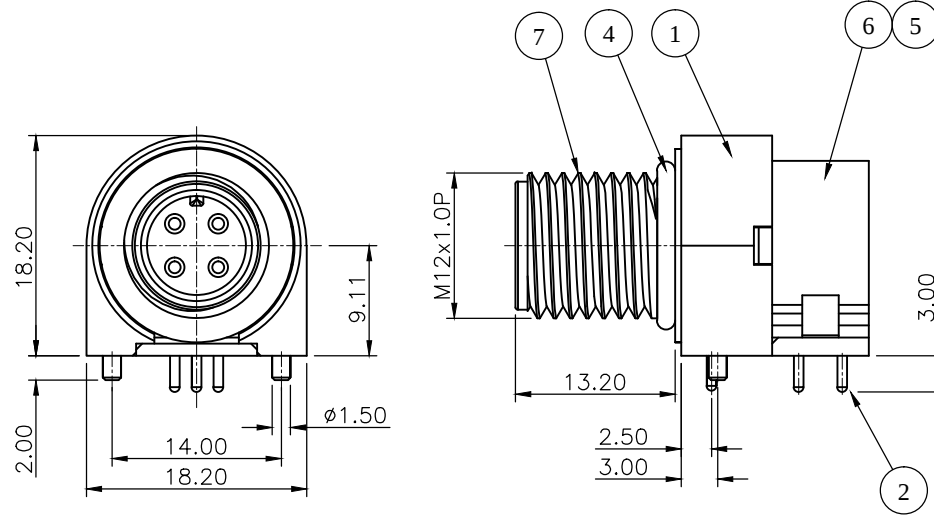

RECOMMENDED LAYOUT (TOP VIEW)
GENERAL TOLERANCE: ± 0.05



PANEL CUT OUT

7	SHELL	Brass, Nickel plating			
6	BASE	PBT, UL94V-0, Black			
5	BACK HOUSING	PBT, UL94V-0, Black			
4	O-RING	EPDM, Black			
3	NUT	Brass, Nickel plating			
2	CONTACT	Brass, Gold plating over Nickel			
1	COVER	PBT, UL94V-0, Black			
NO.	PART NAME	DESCRIPTION			
UNLESS OTHERWISE SPECIFIED TOLERANCE		 ATTEND			
UNIT:	DECIMAL			LINEAR	ANGLES
	X.			±0.50	±5°
	X.X			±0.25	±3°
	X.XX			±0.12	±1°
m m		WWW.ATTEND.COM.TW			
DRAWN	Fros	2017/06/19	DRAWN NAME: M12 A- Code Receptacle, 4Pin Male R/A DIP Front Fastened		
CHECKED	Tim	2017/06/19			
APPROVED	Ken	2017/06/19	PRODUCT NO. 216A-04MRF		
	SCALE 1.6	SHEET 1/1	SIZE A4	FILE NAME 216A-04MRF_B_2	

