


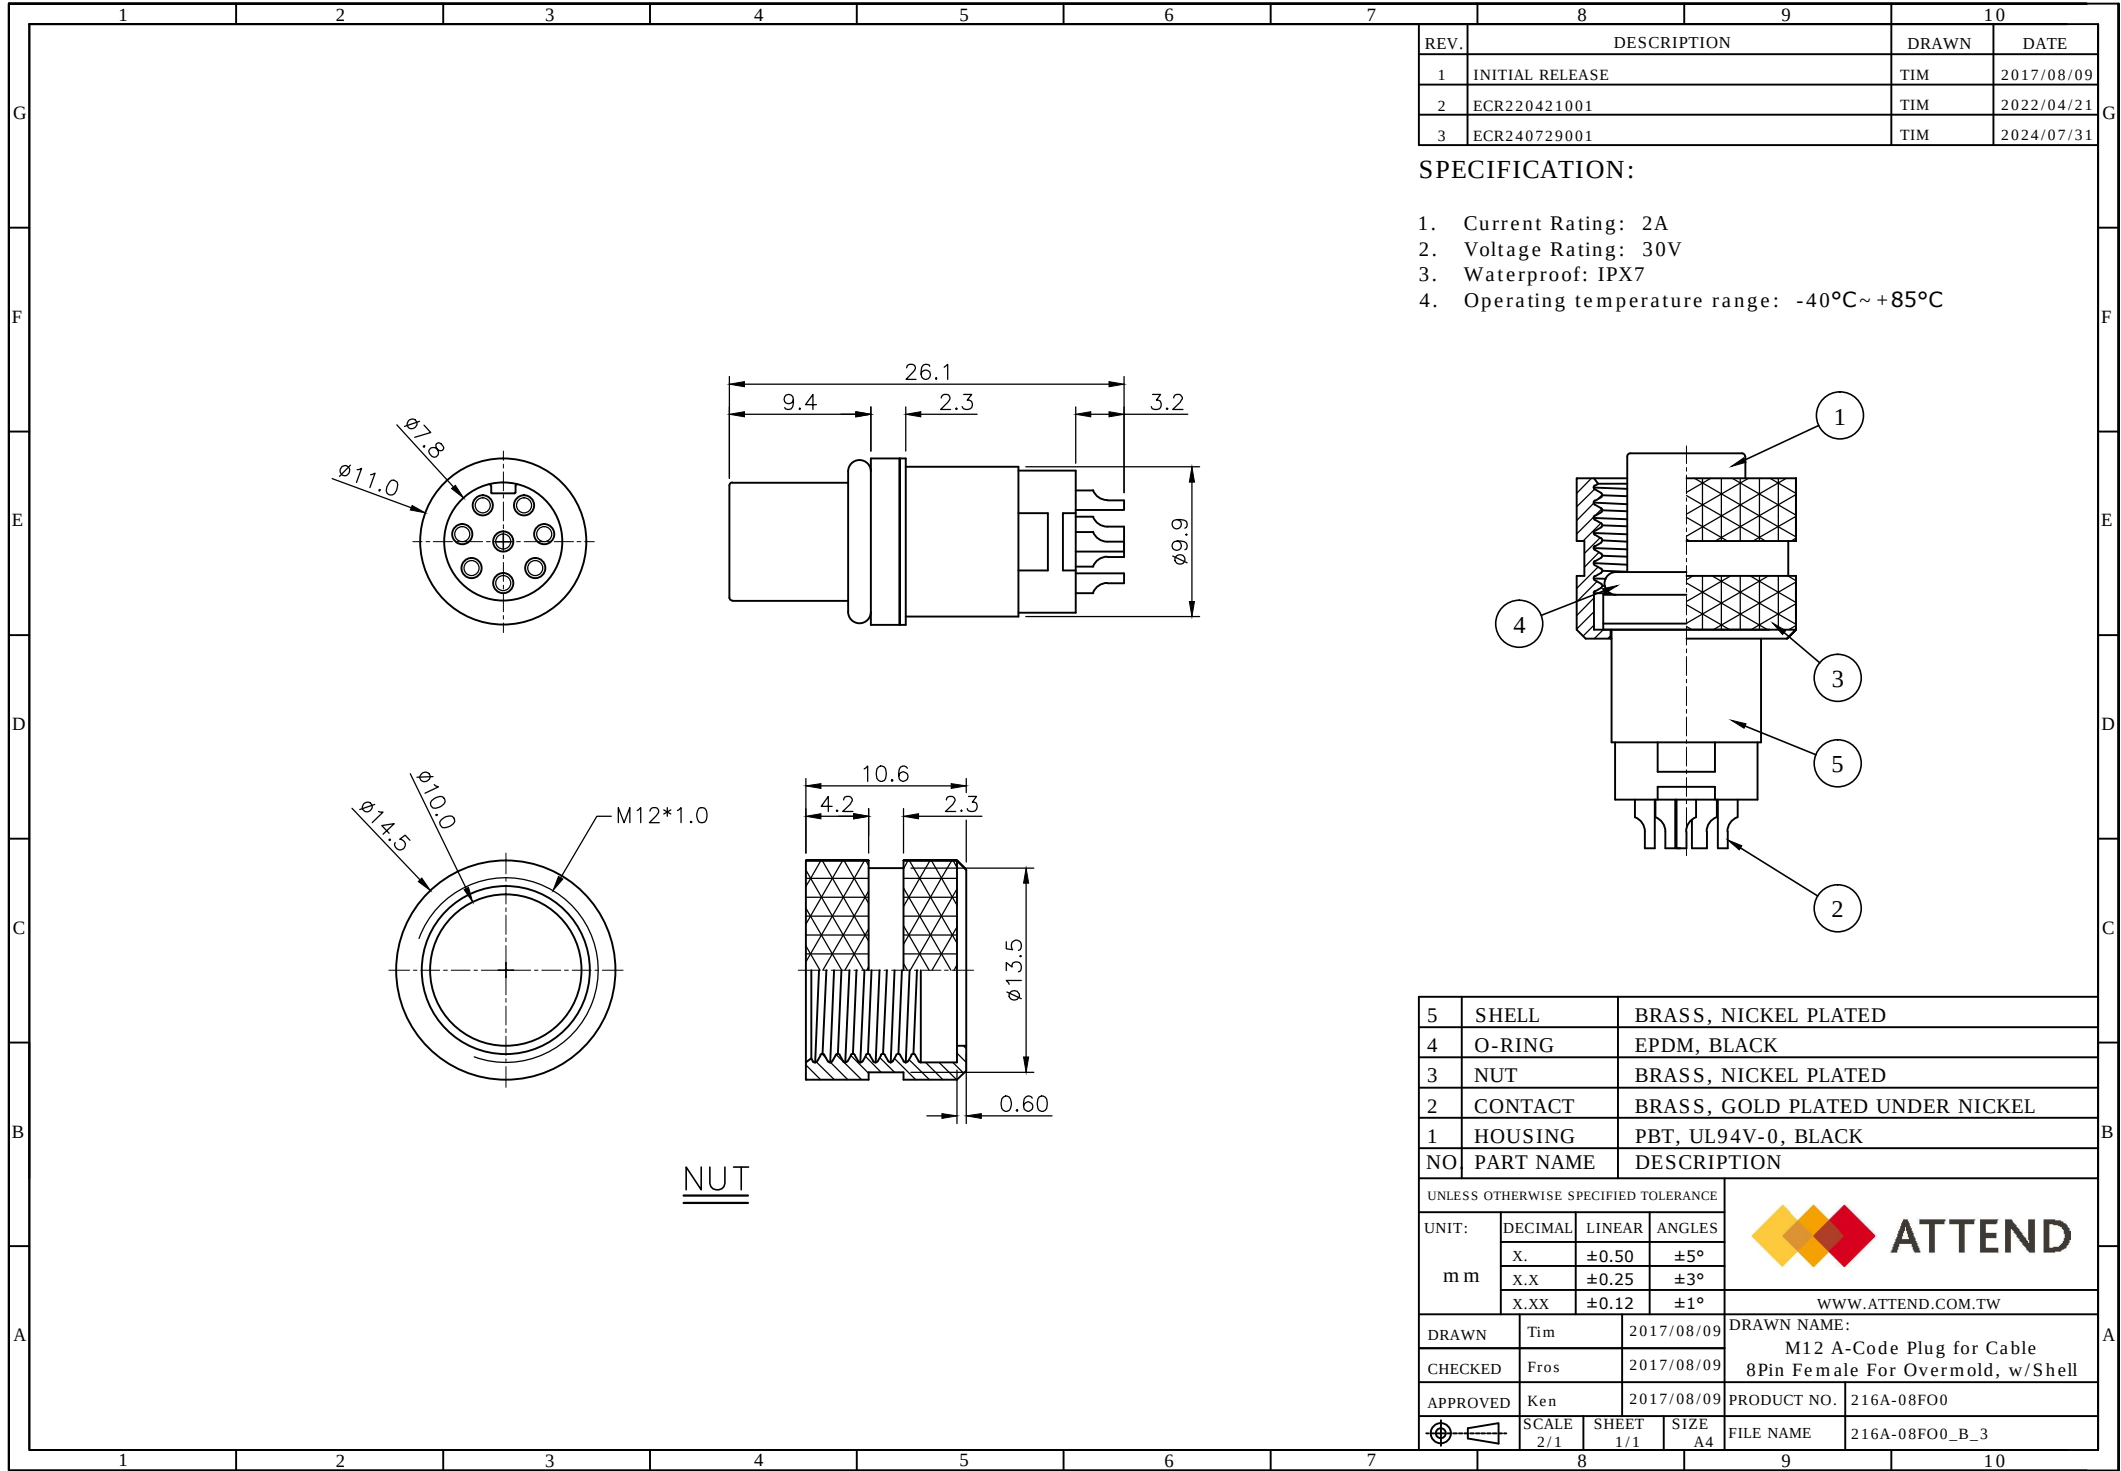

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2017/08/09
2	ECR220421001	TIM	2022/04/21
3	ECR240729001	TIM	2024/07/31

SPECIFICATION:

1. Current Rating: 2A
2. Voltage Rating: 30V
3. Waterproof: IPX7
4. Operating temperature range: -40°C~+85°C

5	SHELL	BRASS, NICKEL PLATED	
4	O-RING	EPDM, BLACK	
3	NUT	BRASS, NICKEL PLATED	
2	CONTACT	BRASS, GOLD PLATED UNDER NICKEL	
1	HOUSING	PBT, UL94V-0, BLACK	
NO	PART NAME	DESCRIPTION	
UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
m m			
WWW.ATTEND.COM.TW			
DRAWN		Tim	2017/08/09
CHECKED		Fros	2017/08/09
APPROVED		Ken	2017/08/09
SCALE		SHEET	SIZE
2/1		1/1	A4
FILE NAME		216A-08FO0_B_3	
DRAWN NAME:			
M12 A-Code Plug for Cable			
8Pin Female For Overmold, w/Shell			
PRODUCT NO. 216A-08FO0			
ATTEND			