


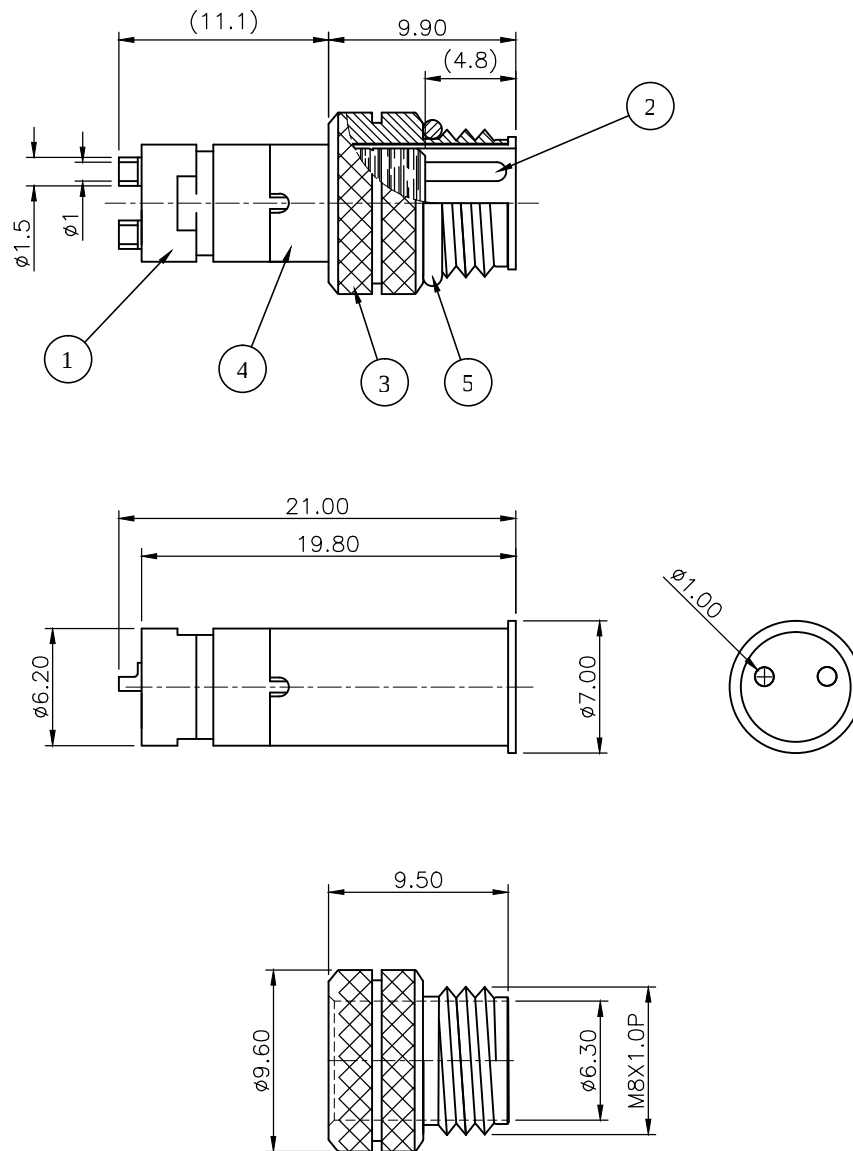

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	FROS	2017/11/29

SPECIFICATION:

1. CURRENT RATING: 3A
2. VOLTAGE: 50VAC/60VDC
3. WATER PROOF: IPX7
4. OPERATION TEMPERATURE: -40°C TO +85°C

5	ORING	NBR, Black			
4	SHELL	Brass, Nickel plating			
3	NUT	Brass, Nickel plating			
2	CONTACT	Brass, Gold plating over Nickel			
1	HOUSING	PBT, UL94V-0, Black			
NO	PART NAME	DESCRIPTION			
UNLESS OTHERWISE SPECIFIED TOLERANCE					
UNIT:	DECIMAL	LINEAR	ANGLES		
m m	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
			 ATTEND		
			www.attend.com.tw		
DRAWN	Fros	2017/11/29	DRAWN NAME: M8 A-Code Plug for Cable 2 Pin Male For Overmold with Cable		
CHECKED	Tim	2017/11/29			
APPROVED	Ken	2017/11/29			
	SCALE 2.5/1	SHEET 1/1	SIZE A4	PRODUCT NO.	219A-02MO0
				FILE NAME	219A-02MO0_B_1