
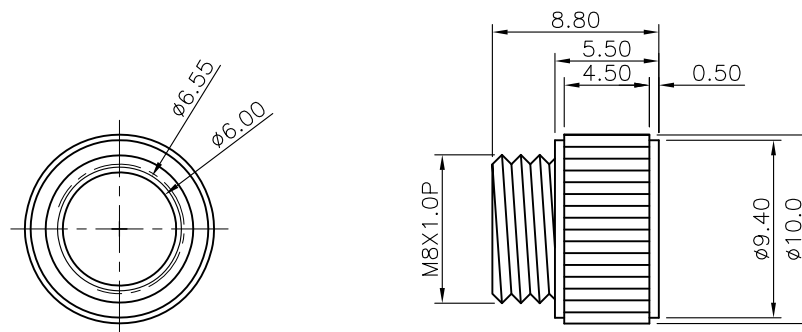



REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	Fros	2018/11/05
2	ECR220421002	Fros	2022/04/21

SPECIFICATION:

1. CURRENT RATING: 1.5A
2. VOLTAGE: 30VAC/DC
3. WATER PROOF: IPX7
4. OPERATION TEMPERATURE: -40°C TO +85°C

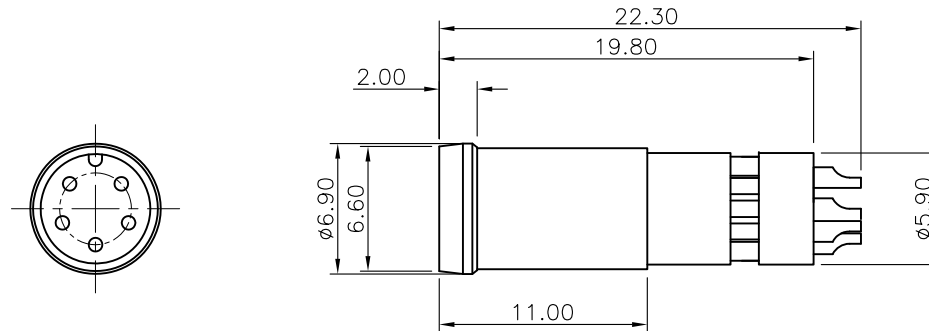

NUT

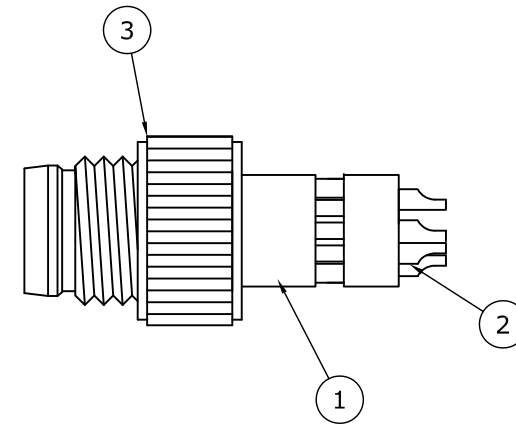

3	NUT	Brass, Nickel plating
2	CONTACT	Brass, Gold Flash over Nickel
1	HOUSING	PA66, UL94V-0, Black
NO	PART NAME	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE			
UNIT:	DECIMAL	LINEAR	ANGLES
mm	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°
DRAWN: Angel 2018/11/05			
CHECKED: Tim 2018/11/05			
APPROVED: Ken 2018/11/05			
SCALE: 2.5/1 SHEET: 1/1 SIZE: A4			
FILE NAME: 219A-05MO0-01_B_2			



WWW.ATTEND.COM.TW

DRAWN NAME:
M8 A-Code Plug for Cable
5Pin Male For Overmold with Cable

PRODUCT NO. 219A-05MO0-01