REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2024/06/07

SPECIFICATION:

1. Current Rating: 1.5A
2. Voltage Rating: 30VAC/DC
3. Waterproof: IPX7
4. Operating temperature range: -40°C~+85°C



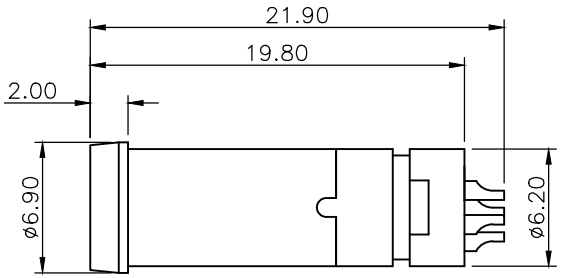

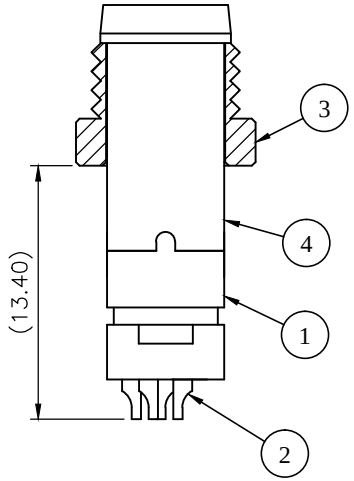

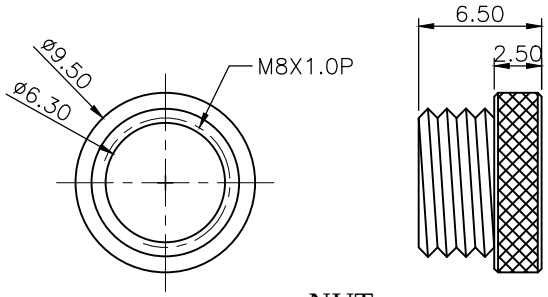

NUT

NO	PART NAME	DESCRIPTION
4	SHELL	Brass, Nickel plating
3	NUT	Brass, Nickel plating
2	CONTACT	Brass, Gold plating over Nickel
1	HOUSING	PBT, UL94V-0, Black

UNLESS OTHERWISE SPECIFIED TOLERANCE

UNIT:	DECIMAL	LINEAR	ANGLES
m m	X.	±0.50	±5°
	X.X	±0.25	±3°
	X.XX	±0.12	±1°

ATTEND

WWW.ATTEND.COM.TW

DRAWN	Tim	2024/06/07
CHECKED	Fros	2024/06/07
APPROVED	Ken	2024/06/07

DRAWN NAME:
M8 A- Code Plug for Cable
6Pin Male for overmold with Cable

SCALE	SHEET	SIZE	PRODUCT NO.	219A-06MO0
2.5/1	1/1	A4	FILE NAME	219A-06MO0_B_1