


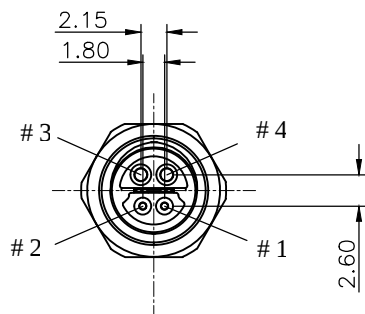
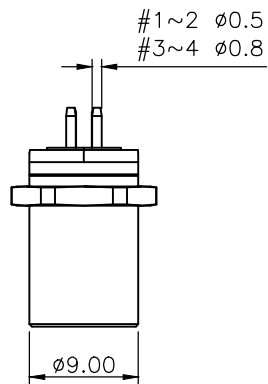





Contacts	Pin No.	Signal
DATA	1	BI_DA+
	2	BI_DA-
POWER	3	+
	4	-

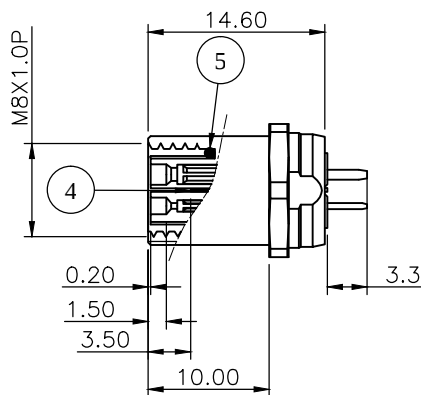

RECOMMENDED PANEL CUT

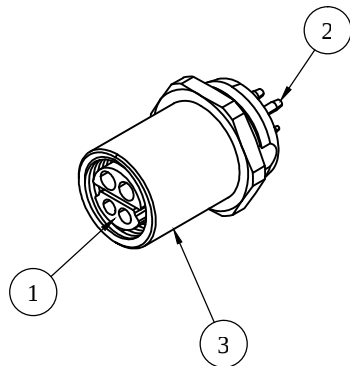

RECOMMENDED PCB LAYOUT (TOP VIEW)
GENERAL TOLERANCE: $\pm 0.05\text{mm}$

REV.	DESCRIPTION	DRAWN	DATE
1	INITIAL RELEASE	TIM	2023/12/27

SPECIFICATION: (IEC 63171-6 Edition 2.0)

1. ELECTRICAL

- 1.1 Current Rating: Pin 1&2 4A, Pin 3&4 8A
- 1.2 Voltage Rating: 60VDC
- 1.3 Contact Resistance: 20mΩ max.
- 1.4 Shell Resistance: 100mΩ max.
- 1.5 Insulation Resistance: 500MΩ
- 1.6 Voltage Proof: 1000VDC (contact to contact), 2250VDC (contact to ground)

2. MECHANICAL

- 2.1 Durability: 100 Cycle
- 2.2 Insertion Force: 50N max.
- 2.3 Pull Out Force: 50N max.

3. ENVIRONMENTAL

- 3.1 Operating temperature range: -40°C~+85°C
- 3.2 Storage temperature range: -40°C~+85°C

4. SOLDER ABILITY

- 4.1 Recommended IR Reflow(Wave Soldering) Temperature: 260°C

5	ORING	Silicone			
4	SHIELD	Phosphor Bronze, nickel plating			
3	SHELL	Brass, nickel plating			
2	CONTACT	Brass, 30u" gold plating			
1	HOUSING	LCP, UL94V-0, Black			
NO. PART NAME		DESCRIPTION			
UNLESS OTHERWISE SPECIFIED TOLERANCE					
UNIT:	DECIMAL	LINEAR	ANGLES		
	X.	±0.50	±5°		
	X.X	±0.25	±3°		
	X.XX	±0.12	±1°		
m m			 ATTEND		
			www.attend.com.tw		
DRAWN	Tim	2023/12/27	DRAWN NAME: SPE M8 4 Pin Hybrid Jack, Straight, 30u" 8A		
CHECKED	Fros	2023/12/27			
APPROVED	Ken	2023/12/27			
	SCALE 1.6	SHEET 1/1	SIZE A4	PRODUCT NO.	229B-S005
				FILE NAME	229B-S005_B_1



www.attend.com.tw